



Double rotary table
flange type


25MPa

The double turntable uses 2 turntables in combination on the same axis, further reducing the overall height.
There are 12-circuit and 16-circuit types available, and each circuit can be used independently. The turntable 1 and the turntable 2 rotate independently, and can be synchronized by using a connecting pin (accessory).

Specification


Model	HWRA66	HWRA88
Number of circuits	12-circuit	16-circuit
Operating fluid	Ordinary mineral oil-based hydraulic oil (equivalent to ISO-VG32) or air	
Maximum operating pressure (MPa)	25	
Allowed RMPs	Different due to different pressure	
Operating environment temperature (°C)	0~70	
Piping interface size	Rp1/4	
Mass (kg)	22	30

12-circuit HWRA66

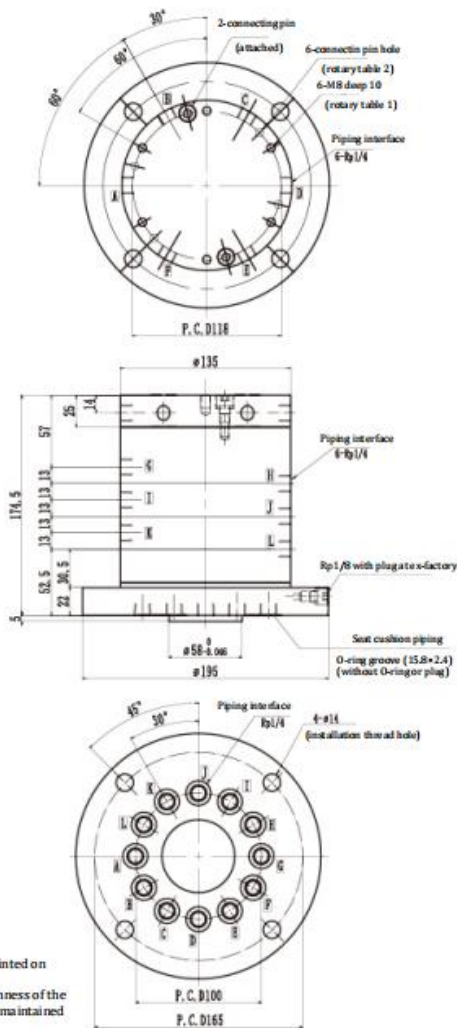

A to L mark numbers are printed on each piping interface. The maximum surface roughness of the installation surface shall be maintained below Ra1.6.

16-circuit HWRA88

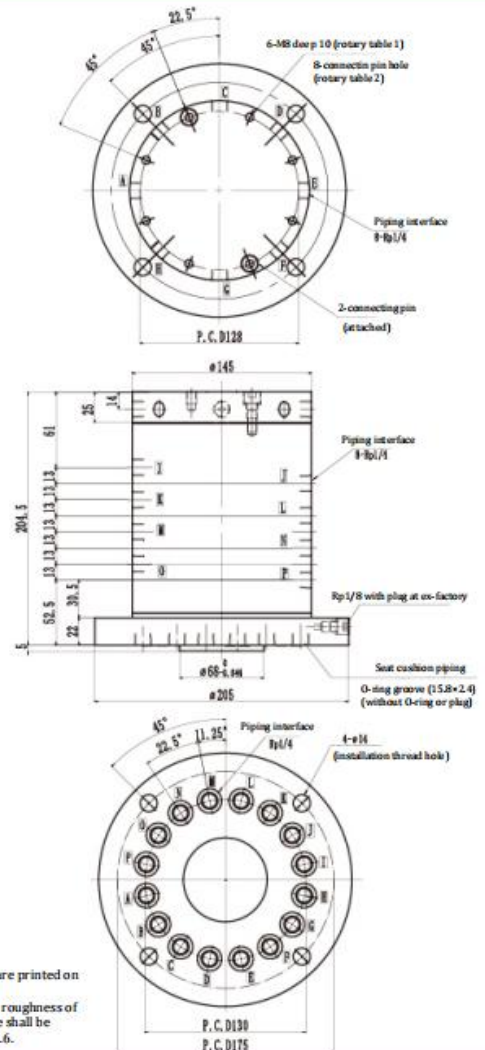

A to P mark numbers are printed on each piping interface. The maximum surface roughness of the installation surface shall be maintained below Ra1.6.